




ISE730.2 Smartphone ATEX pour zones 2/22

Mode de protection:

Type de protection: II 3G Ex ic IIC T4 Gc
II 3D Ex ic IIIB T135°C Dc
Classe de température: T4
Indice de protection : IP54
Zones : 2-22

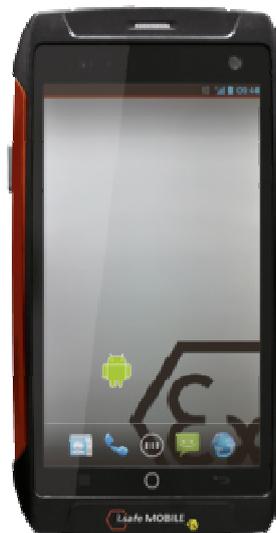

Description:

Le smartphone IS730.2 est conçu pour une utilisation en zones 2/22 ATEX. Combinaison de hautes performances technologiques (android 5.0, LTE, charge sans fil) avec un enveloppe robuste et solide.

Caracteristiques:

ATEX approval: EX-zone 2/22 @ II 3G Ex ic IIC T4 Gc IP54 @ II 3D Ex ic IIIB T135°C Dc IP54	Android™ 5.0 Lollipop	frequencies: GSM 850/ 900/1800/1900 MHz WCDMA 850/900/1900/ 2100 MHz	4G: LTE-FDD Band 1/3/7/20/28, LTE-TDD Band 39/40/41	wireless charging: Qi standard
WiFi IEEE 802.11 b/g/n	Bluetooth® 4.0	size: 156 x 82 x 14 mm, weight: 245 g	3020 mAh battery, standby 450 hrs., talktime 2G/3G: 480 min./420 min.	Near Field Communication
2 cameras: 13 MP rear camera and 5 MP front camera	external memory microSD up to 64 GB	MT6735 (Quad Core 1.3 GHz), internal memory 16 GB ROM and 2 GB RAM	Dual micro SIM	USB OTG
waterproof: 30 min. up to 2 m, impervious to dust and microparticles	operation range from -20 °C to 60 °C	push-to-talk (application of another provider needed)	amplified loudspeaker	g-sensor, l-sensor, p-sen- sor, gyroscope, baro- meter, magnetic sensor and air pressure sensor (application of another provider needed)
5" (12.70 cm) HD Bright View Gorilla Glass 3, capacitive touchscreen with a resolution of 1280 x 720 pixel	GPS, AGPS, GLONASS, BeiDou (localization and navigation via application of another provider)	for use with gloves		

Contenu :

Smartphone, cable USB, chargeur et notice d'instructions.