



## Decontactor DX1 20A

### Protection mode:

Type of protection: II 2GD Ex de IIC  
Td A21  
Class of temperature: T6-T5  
Protection degree: IP65




### Technical data :

#### Main features :

- Rated current (with wiring according to standard) 20 A
- IP protection lid close IP65
- IP protection connected plug IP65
- Resistance to shocks IK 10
- Umax AC 750
- Ambient Temperature -25 °C à +60 °C
- Flexible wiring (min - max) 2,5 - 10 mm<sup>2</sup>
- Stranded wiring (min - max) 2,5 - 10 mm<sup>2</sup>

#### Other wiring on request :

- Keying positions 12
- Protection mode : de

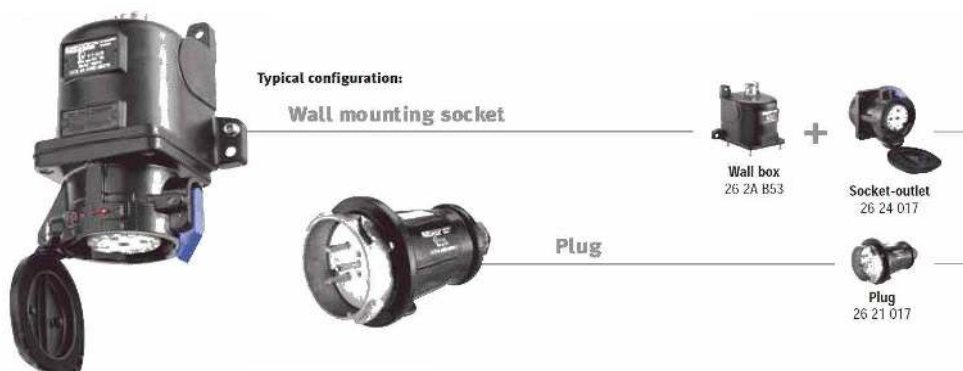

### Socket-outlet (Female)



Voltage 50 Hz	Polarity	Part N°
220 - 250V	1P+N+E	26 24 015
380 - 440V	3P+E	26 24 013
380 - 440V	3P+N+E	26 24 017

### Inlet (male)



Voltage 50 Hz	Polarity	Part N°
220 - 250V	1P+N+E	26 28 015
380 - 440V	3P+E	26 28 013
380 - 440V	3P+N+E	26 28 017

### Boxes

Ex cable gland included



Part N°
M20 26 2A B53 8 – 13 mm

### Option:

Accessories and others products on request.