



Decontactor DX3 32A

Protection mode:

Type of protection: II 2GD Ex de IIC
Td A21
Classe of temperature: T6-T5
Protection degree: IP65




Spécifications techniques

- Rated current (with wiring according to standard) 32 A
- IP protection lid close IP65
- IP protection connected plug IP65
- Resistance to shocks IK 10
- Umax AC 750
- Ambient Temperature -25 °C à +60 °C
- Flexible wiring (min - max) 2,5 - 10 mm²
- Stranded wiring (min - max) 2,5 - 10 mm²

Other wiring on request :

- Keying positions 12
- Protection mode : de
- Zones : 1-2-21-22

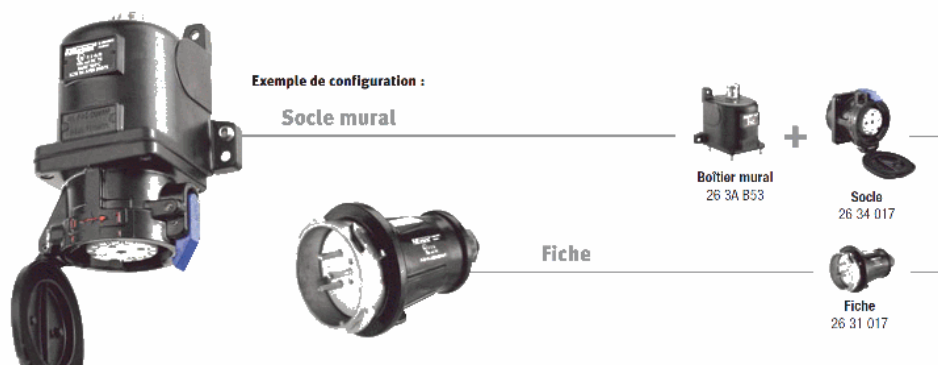

Socket-outlet (Female)



Voltage 50 Hz	Polarity	Part N°
220 - 250V	1P+N+E	26 34 015
380 - 440V	3P+E	26 34 013
380 - 440V	3P+N+E	26 34 017

Inlet (male)



Voltage 50 Hz	Polarity	Part N°
220 - 250V	1P+N+E	26 38 015
380 - 440V	3P+E	26 38 013
380 - 440V	3P+N+E	26 38 017

Boxes

Ex cable gland included



Option:

Accessories and others products on request.

Part N°
M25 26 3A B53 9 – 16 mm