



Decontactor DX6 63A

Protection mode:

Type of protection: II 2GD Ex de IIC
Td A21
Classe of temperature: T6-T5
Protection degree: IP65




Spécifications techniques

- Rated current (with wiring according to standard) 63 A
- IP protection lid close IP65
- IP protection connected plug IP65
- Resistance to shocks IK 10
- Umax AC 750 V
- Ambient Temperature -25 °C à +60 °C
- Flexible wiring (min - max) 16 - 50 mm²
- Stranded wiring (min - max) 16 - 50 mm²

Other wiring on request :

- Keying positions 12
- Protection mode : de
- Zones : 1-2-21-22

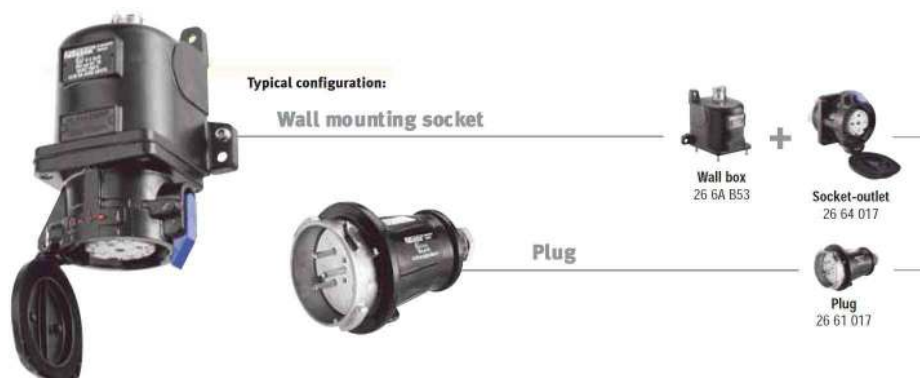

Socket-outlet (Female)



Voltage 50 Hz	Polarity	Part N°
220 - 250V	1P+N+E	26 64 015
380 - 440V	3P+E	26 64 013
380 - 440V	3P+N+E	26 64 017

Inlet (male)



Voltage 50 Hz	Polarity	Part N°
220 - 250V	1P+N+E	26 68 015
380 - 440V	3P+E	26 68 013
380 - 440V	3P+N+E	26 68 017

Boxes

Ex cable gland included



Part N°
M32 26 6A B53 12 – 21 mm

Option:

Accessories and others products on request.