



ETS60 Rotary Siren

Protection mode:

Type of protection: II 2 GD EEx d IIC
 Class of temperature: T6 / 85°C
 Protection degree: IP 65
 Certificate: INERIS 02ATEX0001



Description:

The rotary sirens ETS 60 are composed by a body in aluminium alloy with screwed cover.

Acoustic warning of alarms, averages, etc.

Technical data:


Materials:
 Body: cast iron
 Screws: stainless steel.

Inhibiting treatments:
 Epoxy painting RAL 7000 or 3000.

On request:
 "U" fixing bracket.
 Other RAL colours.

Entry . 3/4 h UNI 6125 (ISO 7/1).

Technical drawing:

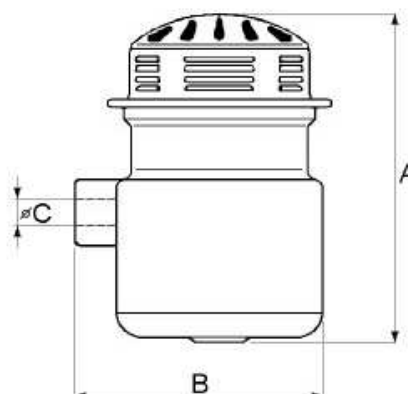

Type	Dimensions (mm)			Voltage (Vac/dc)	Frequency (Hz)	Sound Intensity dB (1m)	Service (minutes)	
	A	B	Ø C				ON	OFF
ETS 60 - 012V	220	143	3/4"	12	50/60	107	2	5
ETS 60 - 024V	220	143	3/4"	24	50/60	109	2	5
ETS 60 - 048V	220	143	3/4"	48	50/60	109	2	5
ETS 60 - 110V	220	143	3/4"	110	50/60	109	2	5
ETS 60 - 230V	220	143	3/4"	230	50/60	109	2	5