



## KAC-F80-G-CH ATEX Hand lamp

### Protection mode:

Type of protection: II 2G Ex ib IIC T4 Gb  
II 2D Ex ib IIIC T130°C Db  
Class of temperature: T4  
Protection degree: IP68  
Ambient Temp : -20/+40°C  
Zones : 1-2-21-22






### Description:

#### Lamp TORCH ATEX

Executive standard: ·IEC 60079-0:2007 ·IEC 60079-11:2006  
·EN 60079-0:2007  
·EN 60079-11:2007  
·EN 60598-1:2008+A11:2009 ·EN 55015:2013  
·IEC 62321:2008

### Technical specifications

	<p>Three stages Click-type switch : high output, working output, and flashing light.</p> <p>High-strength aluminum alloy housing is smoothly sculpted for a comfortable and secure grip, extreme resistance to abrasion and corrosion, IP68.</p>
	<p>Lithium batteries: large power capacity, long lifespan.</p>
	<p>Designed with advanced Optical Principles, making visual distance up to 200m.</p>




## KAC-F80-G-CH ATEX Hand lamp

### Photometric paramater

Type	Reference	Color temp.	CCT(K)	CRI	Luminous flux (lm)	Spotlight beam angle	Floodlight beam angle
KACF80	KACF80GWM-* -E	Warm white	2700-3300	82	129	10	80
	KACF80GNH-* -E	Natural White	3700-4300	70	157		
	KACF80GCH-* -E	Cool white	5400-6400	70	157		

### Dimensions

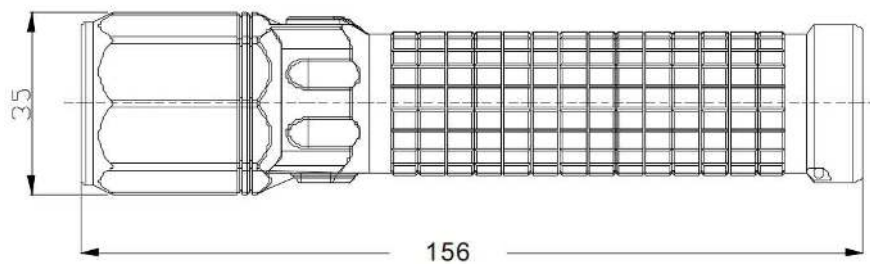

### Accessories

NO.	Name	Picture	Weight(Kg)	QTY
1	Car charger		0.12	1
2	Charger		0.06	1