



Ex-KSF481200 ATEX LED Lighting Swordfish 48W Emergency model 180min

Protection mode:

Type of protection: II 2GD
Ex d eb op IIC T6 Gb
Ex tb is IIIC T80°C Db

Class of temperature: T6

Ambient Temp : -20/+55°C
Zones : 1-2-21-22



Description:

Sword Fish lighting 48W LED.

Energy saving. Reduce the number of luminaires needed, providing excellent luminaries efficiency more light where you need it.

Anti glare, reduces glare in applications where the user may have direct visual contact with the light source.

Shock and vibration resistant tempered glass, reduces the risk of premature failure.

OSRAM LED source. High efficiency lumen output and high CRI.

Reference

Ex	KSF	XX	XX	XXX	XXXX	XX	X	X
Type	Series	Power	Input voltage	Size	Candela	CCT	Update	English
Ex proof	KSF-Sword fish	48W	AC-100-277V	900*136*85mm	H7V7	CH	DL-U	E

Electrical parameters

Reference	Rated input voltage	Rated input current (A)	Voltage frequency (Hz)	Rated power (W)	LED Input current (mA)	PF	THD
Ex-KSF481200H7V7CH-DL-E	AC 100-277	0,49 - 0,18	50/60	48	60	>0,98	<10%

(*others voltage parameters on request)

Photometric parameters


Reference	TEMP	CCT (K)	CRI	Luminous flux (lm)
Ex-KSF481200H7V7CH-DL-E	Cool white	5400-7000	80	6072 / 610 emergency mode

Type	Beam angle*
H7V7	120°

Type	Size (mm)	Weight (Kg)	Amb Temp	Max surface Temp (C°)	Protection degree	Insulation
Ex-KSF481200H7V7CH-DL-E	900*136*85	8.7	-20 / +55°C	39	IP66	I





**Ex-KSF481200 ATEX LED Lighting Swordfish 48W
Emergency model 180min**

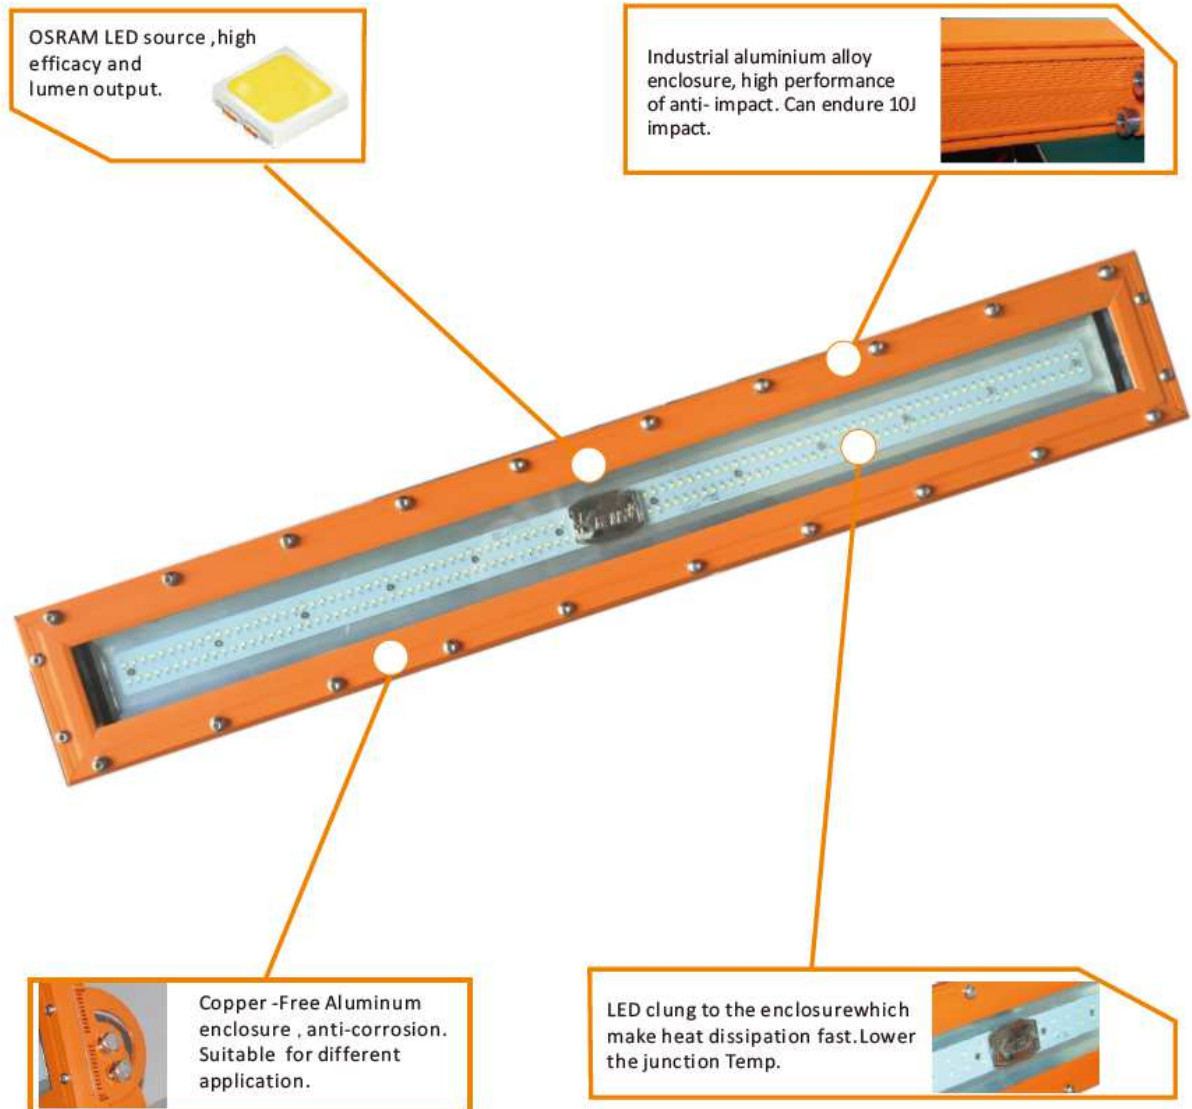





Ex-KSF481200 ATEX LED Lighting Swordfish 48W Emergency model 180min

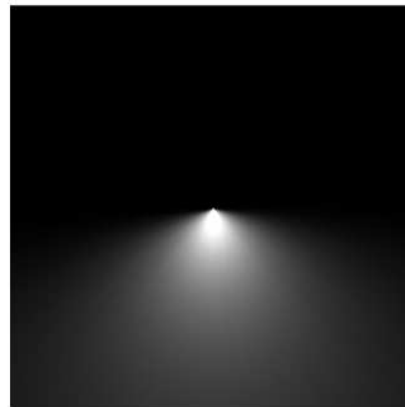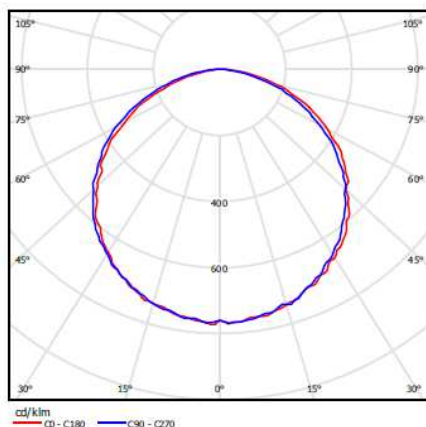

Dimensions

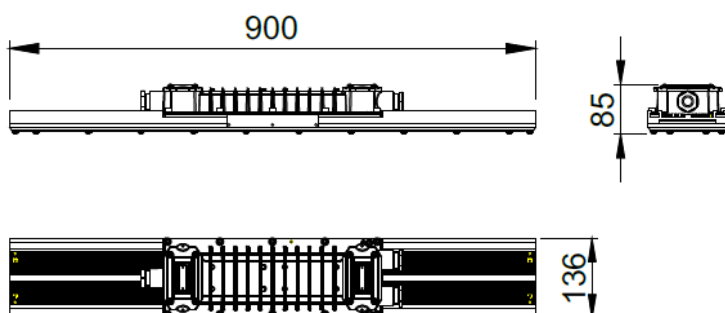


Pipe mounting (Pole bracket PCP-SF-U-O)

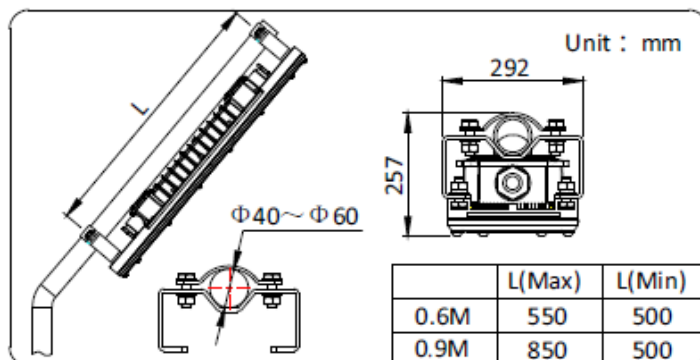




Ex-KSF481200 ATEX LED Lighting Swordfish 48W Emergency model 180min


Ceiling mounting Bracket BR-SF-U-O

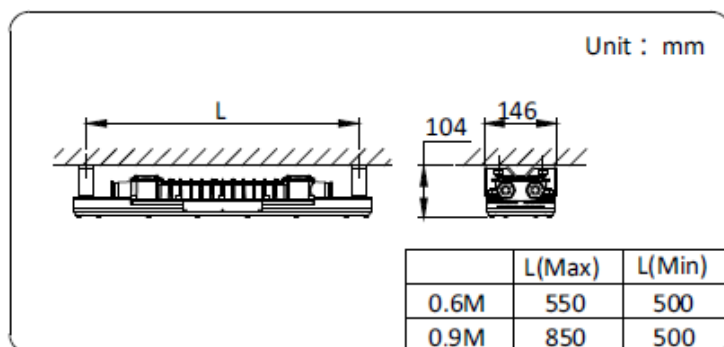

Wall mounting (Stanchion bracket SBT-SF-U-O)

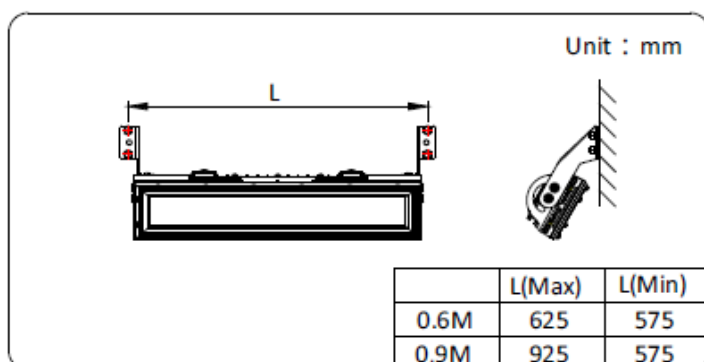

Clamp mounting (CM-SF-U-O)

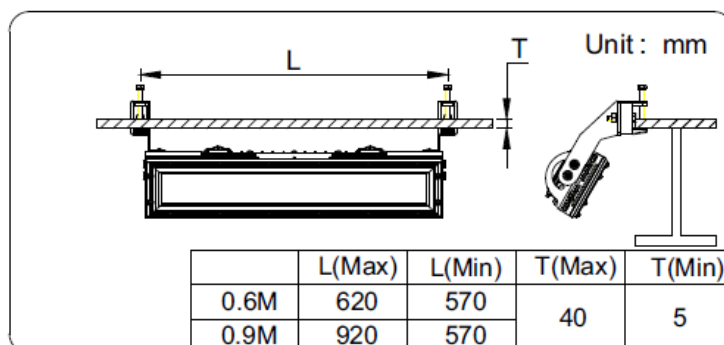



Ex-KSF481200 ATEX LED Lighting Swordfish 48W Emergency model 180min

Accessories

Installations accessories	Reference	Photo	Material	Weight (kg)	QTY
Pipe clamp	PCP-SF-U-O		Q235	2	2
Bracket	BR-SF-U-O		Q235	0,8	2
Stanchion bracket	SBT-SF-U-O		Q235	2,6	2
Clamp mounting	CM-SF-U-O		Q235	3	2
Loop mounting	LO-SF-U-O		Q235	1,2	2