



Protection mode:

Type of protection: II 2 GD- EEx d IIC/ EEx d [ia] IIC
 Class of temperature: T6-T5-T4-T3
 Protection degree: IP 65 / IP 67



Description:

The GUB-X enclosures are square shaped and have a blind threaded cover.

Technical data:

Materials:

Body and cover : stainless steel AISI 316L

Screws : stainless steel

Application:

To contain terminals, contactors, switches, transformers, capacitors, PLC and other electric, electronic equipment and I.S. devices.

Threats:

NPT (ANSI B1.20.1)


Mx1.5 (ISO261)

On request:

IP67 protection with o-ring. Galvanized steel equipment plate.

Breathing / draining valve. AISI 304 Material

Technical drawing:

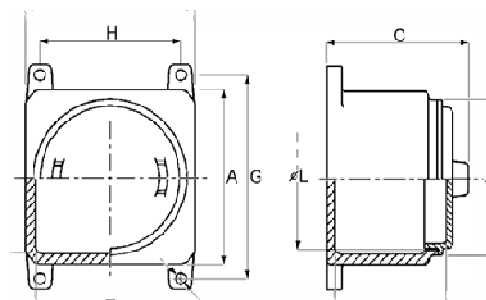

Type	Dimensions (mm)						Fixing (mm)		
	External			Internal			G	H	øI
	A	C	øD	E	øL	F			
GUB / X 00	119	137	112	92	97	98	145	95	2 x 8
GUB / X 0	150	150	136	125	114	115	178	125	2 x 8
GUB / X 0H	150	190	136	125	114	152	178	125	2 x 8
GUB / X 1	200	160	189	170	163	112	228	178	4 x 10
GUB / X 1H	200	200	189	170	163	152	228	178	4 x 10
GUB/X 1PF	176	139	170	150	147	105	196	154	4 x 11
GUB / X 2	250	160	231	225	206	116	275	232	4 x 10
GUB / X 3	250	205	231	225	206	158	285	228	4 x 10
GUB / X 3L	360	245	348	325	320	185	395	318	4 x 10
GUB / X 4	450	305	437	410	406	230	485	410	4 x 10
GUB / X 4A	450	235	437	410	406	160	485	410	4 x 10