



Grounding Clamp ATEX IECEx ON/OFF

Protection mode:

Type of protection: II 2G Ex d IIC T6/T5 Gb
 II 2D Ex tb IIIC T85°C/T100°C Db
 Class of temperature: T6/T5
 Protection degree: IP66
 Ambient Temp : -20/+40°C
 Zones : 1-2-21-22




Description: MODELE PMT1

Indispensable in cases where the temporary grounding of tank trucks or tankers during transfer of liquids or hazardous substances is required for truck, refueling, wagon, vehicules .

The fastener is secured by two brass springs of great strength.
 To be connected on sheet ground metal
 ON/OFF internal switch connexion
 Rugerdise – Safety
 Oil & gas – Maritim – Aeronautic

Buid with internal flameproof switch ON/OFF to establish the contact when the clamp is tight to avoid sparks.

Technical drawing:

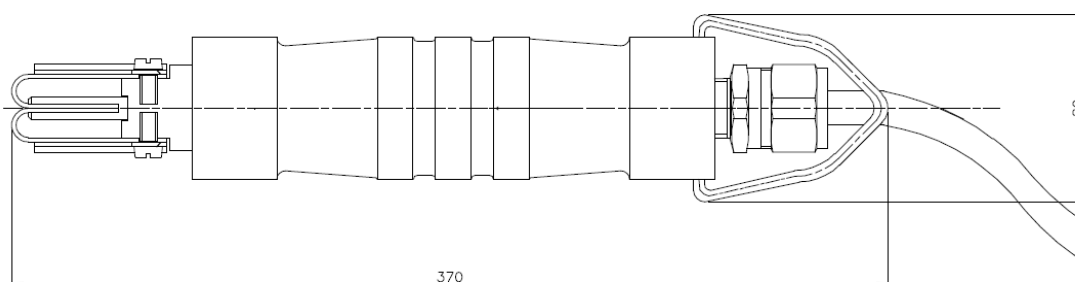

Technical data:

Isolation voltage	Gripping capacity	Max current	Cable section	Weight (kg)
3000V	0,5mm - 3mm	10A	6 - 10 - 16mm ²	1