




ISE730.2 Smartphone ATEX for zones 2/22

Protection mode:

Type of protection: II 3G Ex ic IIC T4 Gc
 II 3D Ex ic IIIB T135°C Dc
 Class of temperature: T4
 Protection degree: IP54
 Ambient Temp :
 Zones : 2-22

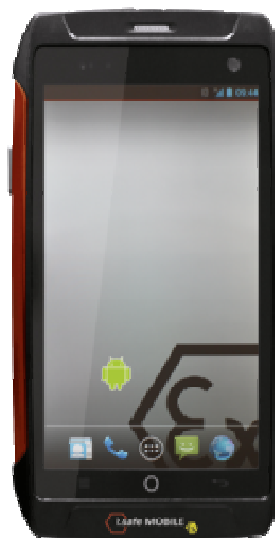

Description:

The IS730.2 is the new ATEX-smartphone for use in zone 2/22. It combines high performance technology (android 5.0, LTE, wireless charging) with highest robustness and modern design.

Technical data:

ATEX approval: EX zone 2/22 II 3G Ex ic IIC T4 Gc IP54 II 3D Ex ic IIIB T135°C Dc IP54	Android™ 5.0 Lollipop	frequencies: GSM 850/ 900/1800/1900 MHz WCDMA 850/900/1900/ 2100 MHz	4G: LTE-FDD Band 1/3/7/20/28, LTE-TDD Band 39/40/41	wireless charging: Qi standard
WiFi IEEE 802.11 b/g/n	Bluetooth® 4.0	size: 156 x 82 x 14 mm, weight: 245 g	3020 mAh battery, standby 450 hrs., talktime 2G/3G: 480 min./420 min.	Near Field Communication
2 cameras: 13 MP rear camera and 5 MP front camera	external memory microSD up to 64 GB	MT6735 (Quad Core 1.3 GHz), internal memory 16 GB ROM and 2 GB RAM	Dual micro SIM	USB OTG
waterproof: 30 min. up to 2 m, impervious to dust and micropar- ticles	operation range from -20 °C to 60 °C	push-to-talk (application of another provider needed)	amplified loudspeaker	g-sensor, l-sensor, p-sen- sor, gyroscope, baro- meter, magnetic sensor and air pressure sensor (application of another provider needed)
5" (12.70 cm) HD Bright View Gorilla Glass 3, capacitive touchscreen with a resolution of 1280 x 720 pixel	GPS, AGPS, GLONASS, BeiDou (localization and navigation via application of another provider)	for use with gloves		

Contents :

Smartphone, USB cable, charger, quick start manual and safety instructions