




## PXN 12C

### Protection mode:

Type of protection: II2 G/D Ex e II tD A21  
 Class of temperature: T6-T5  
 Protection degree: IP 66 / IP 67

### Technical data :

- Number of contacts 11P+E
- Ambient temperature -40/+55°C
- (socket-outlet) IP IP65
- (socket-outlet + inlet) IP IP65
- Shocks resistance IK 09
- U max 220 V
- Wiring (min/max) flexible 1,5 / 2,5 mm<sup>2</sup>
- Rated currents 10A
- Zones 1-2-21-22

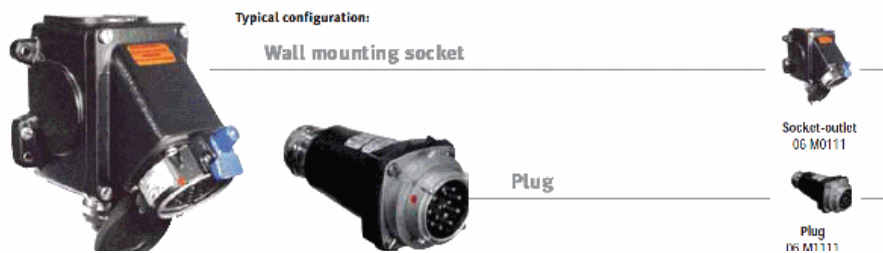

### Socket-outlet (Female)

	∅	Part N°
M25	9-16 mm	06 M0111 25M
M32	12-21 mm	06 M0111




### Plug (Male)


	∅	Part N°
M25	9-16 mm	06 M1111 25M
M32	12-21 mm	06 M1111

**Options:** Accessories and others products on request.

### Fiche



### Socket mural (45°)

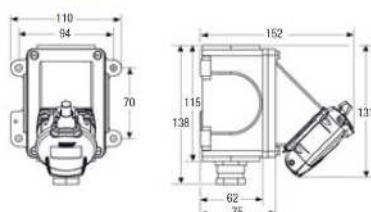

### Fiche enclenchée (A1) / déclenchée (A0) dans un socle mural (45°)

